



Areas of application

- “ Furniture lighting
- “ Decorative lighting
- “ Accent lighting
- “ Hidden lighting

Product benefits

- “ Product is tested by accredited laboratories using various conditions
- “ High quality Samsung SMD LED
- “ LED SMD packaging is tested and meets LM-80 and photobiological safety requirements
- “ Optimal LEDs pitch delivers „line of light“ effect even using low LED profiles
- “ High color quality meets EU requirements of indoor lighting
- “ 6-year manufacturer's warranty (L70 >54 000 h)
- “ Made in Europe



Product features

- “ Flexible and cuttable LED strip
- “ Rated power **12 W per meter**
- “ Efficiency up to 129 lm/W
- “ CRI >80 and CRI >90 available
- “ Dimmable
- “ Both 12V and 24V options available
- “ (12V) 6 m—optimal length connecting from both sides to avoid voltage drop more than 1 volt per strip
- “ (24V) 14 m—optimal length connecting from both sides to avoid voltage drop more than 2 volt per strip

Electrical data

Item family code	Nominal voltage	Type of current	Nominal current,	Rated power
1212S12	12 V	DC	1 A/m	12 W/m
1212S24	24 V		0,5 A/m	12 W/m

Dimensions

Item family code	
1212S12	
1212S24	
	

¹ 12V led strip can be cut every 25 mm

² 24V led strip can be cut every 50mm

³ wires are soldered at both ends of reel in typical product assembly

Photometrical data CRI > 80

Item code	CCT	Color	CRI	Light output	Efficiency
1212S12-27	2700K	Warm White	>80	1382 lm/m	116 lm/W
1212S12-30	3000K	Warm white		1410 lm/m	118 lm/W
1212S12-40	4000K	Neutral white		1523 lm/m	127 lm/W
1212S12-57	5700K	Cool White		1551 lm/m	129 lm/W

1212S24-27	2700K	Warm white	>80	1382 lm/m	116 lm/W
1212S24-30	3000K	Warm white		1410 lm/m	118 lm/W
1212S24-40	4000K	Neutral white		1523 lm/m	127 lm/W
1212S24-57	5700K	Cool White		1551 lm/m	129 lm/W


Photometrical data CRI > 90

Item code	CCT	Color	CRI	Light output	Efficiency
1212S12K30	3000K	Warm white	>90	1212 lm/m	101 lm/W
1212S12K40	4000K	Neutral white		1269 lm/m	106 lm/W
1212S24K30	3000K	Warm white		1212 lm/m	101 lm/W
1212S24K40	4000K	Neutral white		1269 lm/m	106 lm/W


Temperature conditions

Item family code	Ambient working	Product working	Storage temperature
1212S12	-30C ~ +30°C	Less than 60°C at room temperature 23°C	-40C ~ +85°C
1212S24			

Light spectrum diagram CRI > 80

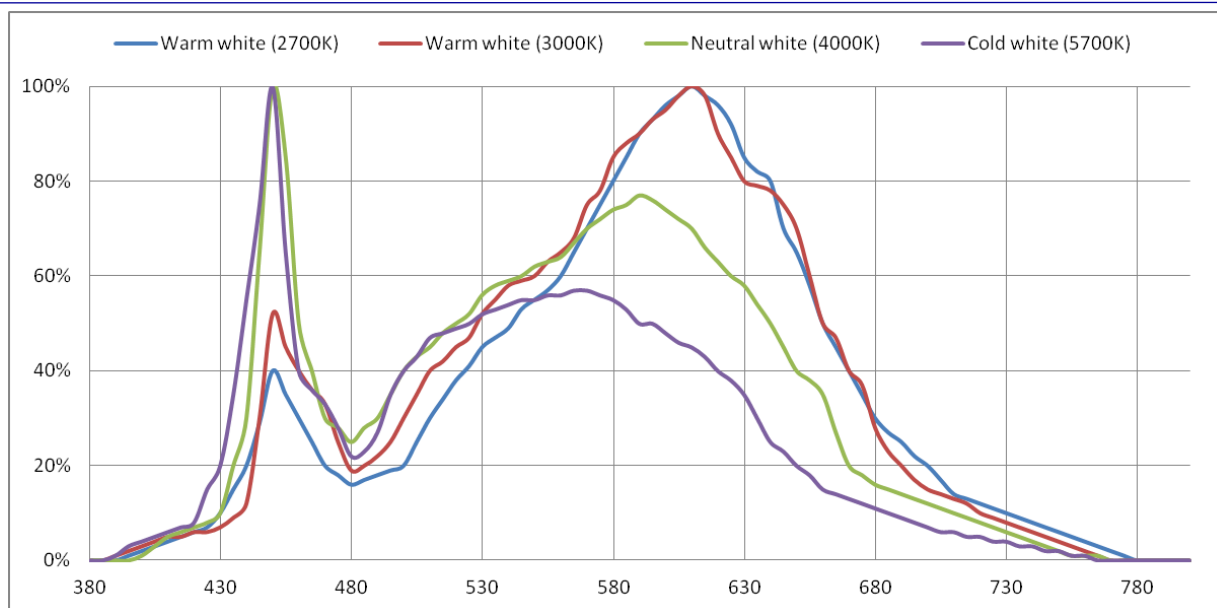

Light spectrum diagram CRI > 90

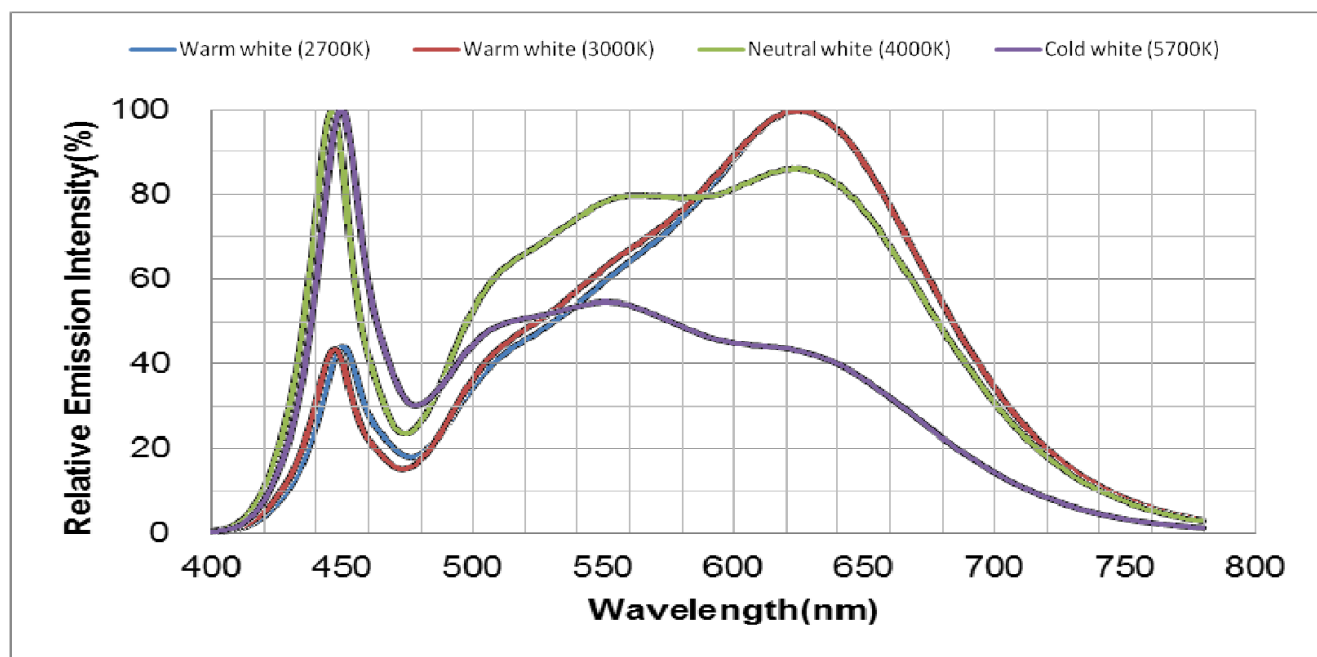


Information here is provided by LED packaging manufacturer

Color temperature and range

Color bin code	Color description	CCT Color range
ANSI 2700	Warm White	2700 K
ANSI 3000	Warm White	3000 K
ANSI 4000	Neutral white	4000 K
ANSI 5700	Cool white	5700 K

Light distribution

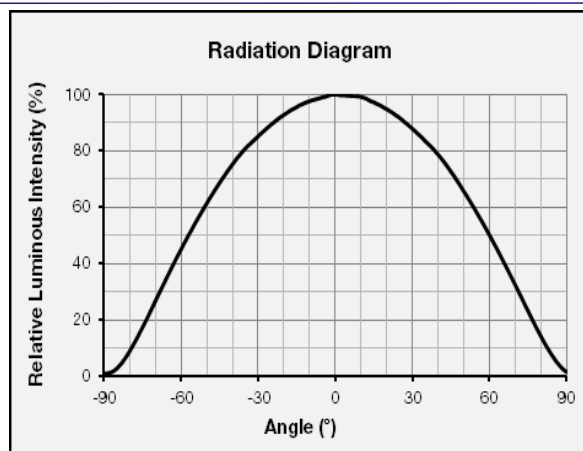

* Information here is provided by LED packaging manufacturer


Standards and declarations of conformity

Declarations of conformity: CE (RoHS is part of CE)

Meets standards: LST EN 60598-1:2009, IEC / EN 60068-2-14:2009, EN 62031:2008, EN 62031:2008/A1:2013, EN 62031:2008/A2:2015, EN/IEC 60068-2-14:2009.

Important: Product is assembled using LED packages that are tested using LM-80 for no less than 9000 hours.

Energy label

Modelis/Model: 1212S12-30					EEI		
12 W/m	12V DC	3000K	1410 Lm/m	5m			
	6 METŲ GARANTUJA	CRI> 80	IP20	RoHS			
ĮSPĖJIMAS		Šioje pakuotėje yra elektrosstatiniam krūviui ir drėgmei jautrus įrenginys					
DĖMESIO		Laikymo temperatūra: -40, +80 °C					

Standard packaging

Product packaging is designed and manufactured based on: EN 13427:2006, EN 13427:2006. Packaging materials can be recycled according to EN 13430:2007

Carton box. Size 187*183*20mm

Carton reel. Size D=190mm h=15mm

LED strip length per reel—5m

Note: installation instructions are included in every box