

Areas of application

- Furniture lighting
- Decorative lighting
- Accent lighting

Product benefits

- Product is tested by accredited laboratories using various conditions
- High quality Samsung SMD LED
- LED SMD packaging is tested and meets LM-80 and photobiological safety requirements
- High color quality meets EU requirements of indoor lighting
- 6-year manufacturer's warranty (L70 >54 000 h)
- Made in Europe


Product features

- Flexible and cuttable LED strip
- Rated power **3 W per meter**
- Efficiency up to 127 Lm/W
- CRI >80 and CRI >90 available
- Dimmable
- (12V) 12m—optimal length connecting from both sides to avoid voltage drop more than 1 volt per strip

Electrical data

Item family code	Nominal voltage	Type of current	Nominal current	Rated power
330s12	12 V	DC	0,25 A/m	3 W/m

Dimensions

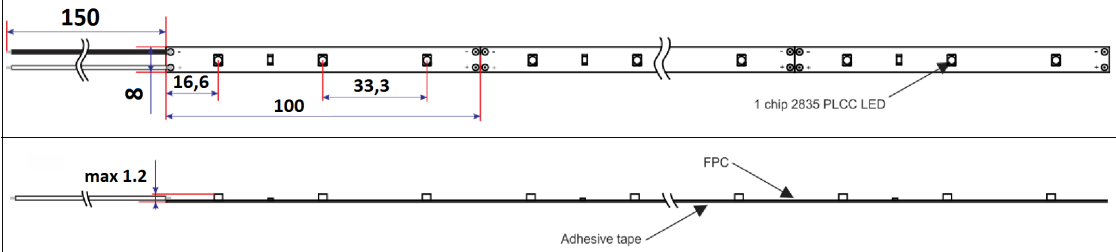Item family code	Diagram
330s12	

¹ LED strip can be cut every 100 mm

² wires are soldered at both ends of reel in typical product assembly

Photometrical data CRI>80

Item code	CCT	Color	CRI	Light output	Efficiency
330s12-27	2700K	Warm white	>80	344 lm/m	115 lm/W
330s12-30	3000K	Warm white		351 lm/m	117 lm/W
330s12-40	4000K	Neutral white		372 lm/m	124 lm/W
330s12-57	5700K	Cool White		381 lm/m	127 lm/W

Photometrical data CRI>90


Item code	CCT	Color	CRI	Light output	Efficiency
330s12K30	3000K	Warm white	>90	296 lm/m	99 lm/W
330s12K40	4000K	Neutral white		310 lm/m	103 lm/W

* All information is provided considering 1 meter length. Real life performance may fluctuate due to tolerances in components used in manufacturing


Temperature conditions

Item family code	Ambient working temperature, t ^a	Product working temperature	Storage temperature
330s12	-30C ~ +30°C	Less than 60°C at room temperature 23°C	-40C ~ +85°C

Light spectrum diagram CRI > 80

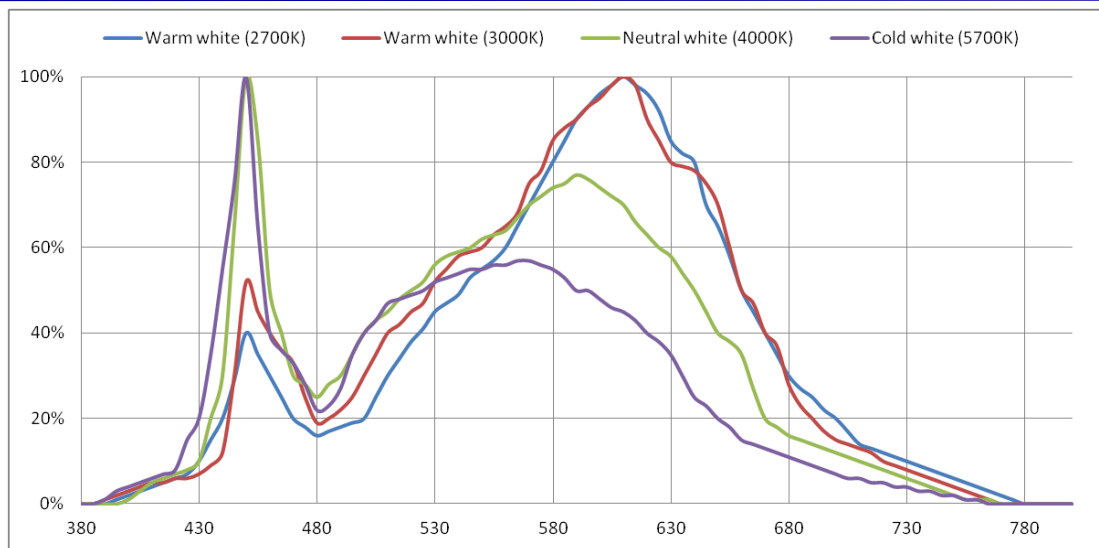

Light spectrum diagram CRI > 90

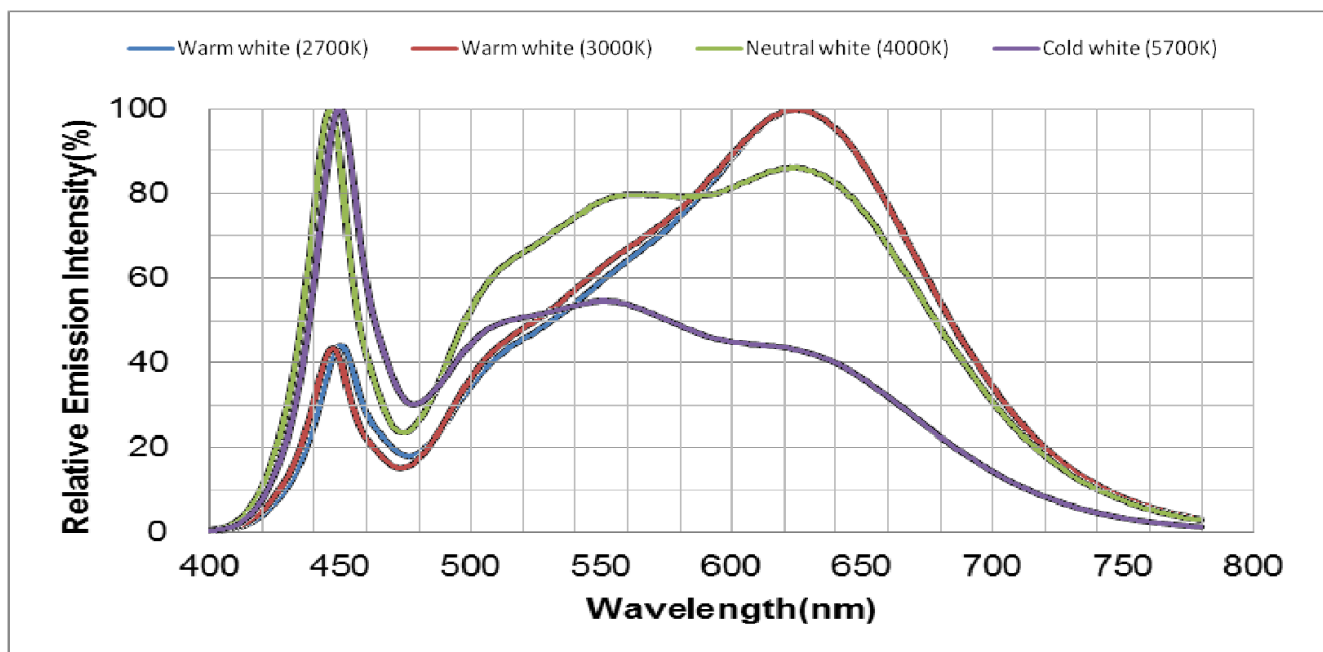


* Information here is provided by LED packaging manufacturer

Color temperature and range

Color bin code	Color description	CCT Color range
ANSI 2700	Warm White	2700 K
ANSI 3000	Warm White	3000 K
ANSI 4000	Neutral white	4000 K
ANSI 5700	Cool white	5700 K

Light distribution

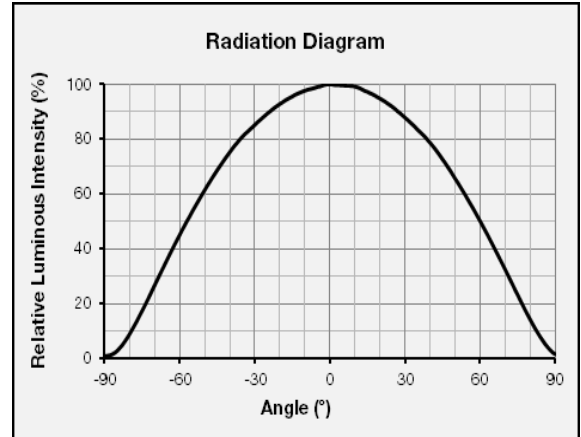

* Information here is provided by LED packaging manufacturer




Standards and declarations of conformity

Declarations of conformity: *CE (RoHS is part of CE)*

Meets standards: *LST EN 60598-1:2009, IEC / EN 60068-2-14:2009, EN 62031:2008, EN 62031:2008/A1:2013, EN 62031:2008/A2:2015, EN/IEC 60068-2-14:2009.*

Important: Product is assembled using LED packages that are tested using LM-80 for no less than 9000 hours.

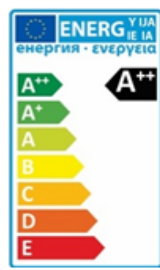Energy label and marking

Modelis/Model: 330S12-30IP					EEI		
3 W/m	12V DC	3000K	351 Lm/m	6m			
	6 METŲ GARANTUJA	CRI > 80	IP67	RoHS			CE
ISPĖJIMAS	Šioje pakuotėje yra elektrosstatinis krūviui ir drėgmei jautrus išorinis						
DĖMESIO	Laikymo temperatūra: -40, +80 °C						

Standard packaging

Product packaging is designed and manufactured based on: *EN 13427:2006, EN 13427:2006*. Packaging materials can be recycled according to *EN 13430:2007*

Carton box. Size 187*183*20mm

Carton reel. Size D=190mm h=15mm

LED strip length per reel—5 meters

Note: installation instructions are included in every box